

UniFi[®] | SECURITY GATEWAY

Enterprise Gateway Router
with Gigabit Ethernet

Model: USG

QUICK START GUIDE

Introduction

Thank you for purchasing the Ubiquiti Networks® UniFi® Security Gateway. This Quick Start Guide is designed to guide you through installation and also includes warranty terms.

Package Contents



UniFi Security Gateway



Power Adapter
(12V, 1A)



Power Cord



Screws
(Qty. 2)



Screw Anchors
(Qty. 2)



Quick Start Guide


TERMS OF USE: All Ethernet cabling runs must use CAT5 (or above). It is the professional installer's responsibility to follow local country regulations and indoor cabling requirements.

UniFi Controller System Requirements

- Microsoft Windows 8, Mac OS X, or Linux
- Java Runtime Environment 1.6 (or above)
- Web Browser: Mozilla Firefox, Google Chrome, Microsoft Edge, or Microsoft Internet Explorer 11
- UniFi Controller software v5.4 or higher (available at: www.ubnt.com/download/unifi)

Network Requirements

A UniFi Cloud Key or management station running the UniFi Controller software, located either on-site and connected to the same Layer-2 network, or off-site in the cloud or NOC

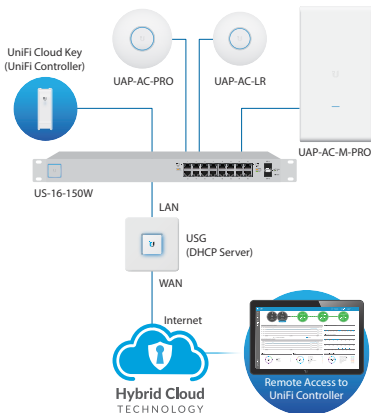

Sample Network Diagram

All UniFi devices support off-site management controllers. For setup details, see the User Guide on our website at: www.ubnt.com/download/unifi


Hardware Overview

Ports Panel



Interface	Description
Console	RJ45 serial console port for CLI management. Use a RJ45-to-DB9 serial console cable to connect the <i>Console</i> port to your computer. Then configure using the following settings: • <i>Baud rate</i> 115200 • <i>Data bits</i> 8 • <i>Parity</i> NONE • <i>Stop bits</i> 1 • <i>Flow control</i> NONE
Reset	Resets to factory defaults. The UniFi Security Gateway should be powered on. Press and hold the Reset button for about 10 seconds until the right LED on the <i>WAN 2 / LAN 2</i> port starts flashing and then becomes solidly lit. After a few seconds, the LED will turn off, and the UniFi Security Gateway will automatically reboot.
WAN 1	Supports 10/100/1000 Ethernet WAN connections. Default setting is <i>DHCP</i> client.
LAN 1	Supports 10/100/1000 Ethernet LAN connections. Default setting is <i>DHCP</i> Server. Server IP: 192.168.1.1/24
WAN 2 / LAN 2	Supports 10/100/1000 Ethernet connections. Configure the port using the UniFi Security Gateway configuration interface.

LEDs

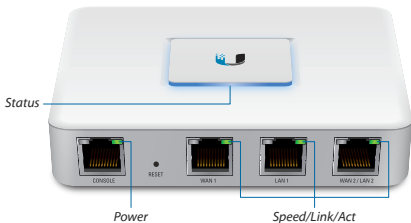

LED		State	Status
Status Indicator	Status	White	Fully Booted; Not Adopted
		Blue	Adopted and Provisioned
		Alternating White/Blue	Device Firmware is Upgrading
		Blue Flashing	Device Locator Activated from UniFi Controller
Console	Power	Off	Power Off
		Green	Power On
Ethernet	Speed/ Link/ Act	Off	No Link
		Amber	Link Established at 10/100 Mbps
		Amber Flashing	Link Activity at 10/100 Mbps
		Green	Link Established at 1000 Mbps
		Green Flashing	Link Activity at 1000 Mbps

Hardware Installation

The UniFi Security Gateway can be used on a level, stable surface, or mounted to a wall with the included screws and anchors. If you are not going to mount the UniFi Security Gateway on a wall, then skip to the section, *Connecting Power*.

! **WARNING:** To reduce the risk of fire or electric shock, do not expose this product to rain or moisture.

! **WARNING:** FAILURE TO PROVIDE PROPER VENTILATION MAY CAUSE FIRE HAZARD. KEEP AT LEAST 20 MM OF CLEARANCE NEXT TO THE VENTILATION HOLES FOR ADEQUATE AIRFLOW.

Wall-Mounting


To mount the UniFi Security Gateway on a wall, you will need a drill, a 6 mm drill bit, and a Phillips screwdriver.

1. Use a 6 mm drill bit to drill two holes 90 mm apart. Insert a *Screw Anchor* into each hole.




640-00120-04

2. Use a Phillips screwdriver to secure a *Screw* into each anchor. Leave a clearance of approximately 3 mm between the screw head and the wall.




3. Position the UniFi Security Gateway over the *Screws*, and insert the *Screws* into the wall-mount slots located on the bottom of the UniFi Security Gateway. Then slide the UniFi Security Gateway down to lock it into place.

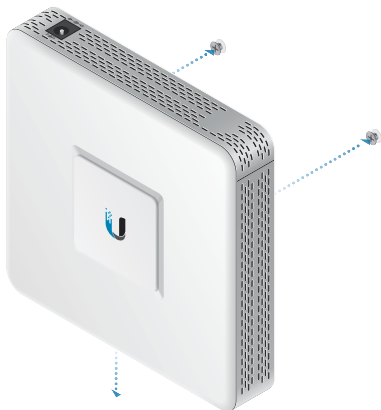


Connecting Power

1. Connect the *Power Adapter* to the power port.

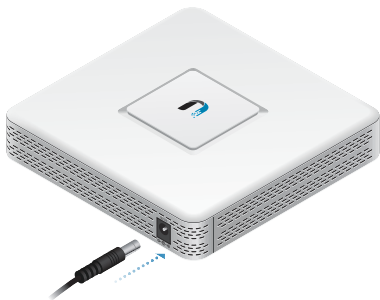


2. Connect the *Power Cord* to the *Power Adapter*. Connect the other end of the *Power Cord* to a grounded power source.

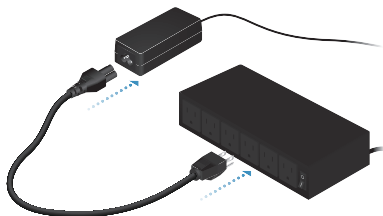


Network Connections

1. Connect an Ethernet cable from a broadband modem or WAN to the *WAN 1* port.

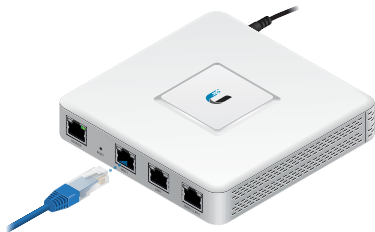

2. Connect an Ethernet cable from a network switch to the *LAN 1* port.

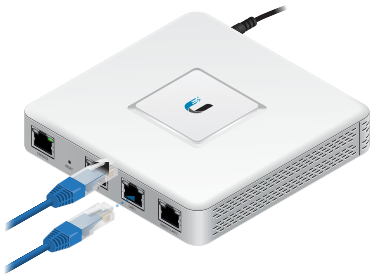

Note: *LAN 1* is set to *DHCP Server* by default.

Software Installation

Download and install the latest version of the UniFi Controller software at: **www.ubnt.com/download/unifi**


From a management station connected to the same Layer-2 network, launch the installer and follow the on-screen instructions.

 **Note:** If you already have UniFi Controller v5.4 or higher installed, go to the section, *Adopting the UniFi Security Gateway*.

1. The *Ubiquiti UniFi Controller* window will appear. Click **Launch a Browser to Manage the Network**.



2. Select your country and time zone. Alternatively, you can click **restore from a previous backup** to use a file that contains your backup settings. Click **Next**.

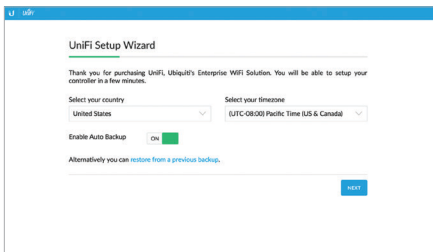

- The UniFi Controller will discover the UniFi Security Gateway with the default *IP Address, 192.168.1.1*. Select the device, and click **Next**.

Configure devices

Please select the devices you would like to configure.

☐	DEVICE NAME	MODEL	IP ADDRESS	UPTIME
☒	24-a4-3c3c-f4-b6	UniFi Security Gateway 3P	192.168.1.1	6m 4s

Showing 1-1 of 1 records. Items per page: 10

[BACK](#) [NEXT](#)

- Create an *SSID* (wireless network name) and *Security Key*. Click **Next**. If you do not have any UniFi APs on the network, click *Skip*.

Configure WiFi


You may skip this step if you are not setting up any UniFi access points.

Optionally, you may create an open wireless network for your guests:

☒ Enable Guest Access

[BACK](#) [SKIP](#) [NEXT](#)

5. Create an *Admin Name* and *Password* for super admin access to the UniFi Controller. Confirm the *Password*, and click **Next**.

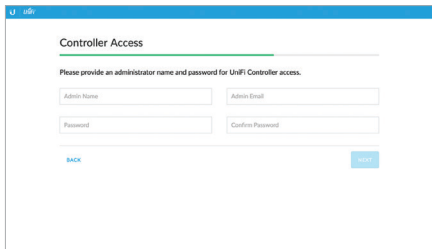

The screenshot shows the 'Controller Access' step of the UniFi setup wizard. The header is blue with the UniFi logo. Below the title, a green progress bar is partially filled. The instruction reads: 'Please provide an administrator name and password for UniFi Controller access.' There are four input fields: 'Admin Name', 'Admin Email', 'Password', and 'Confirm Password'. At the bottom, there are 'BACK' and 'NEXT' buttons.

Controller Access


Please provide an administrator name and password for UniFi Controller access.

Admin Name Admin Email

Password Confirm Password

BACK NEXT

6. Review the UniFi Controller settings. Click **Finish** to complete the UniFi Setup Wizard.

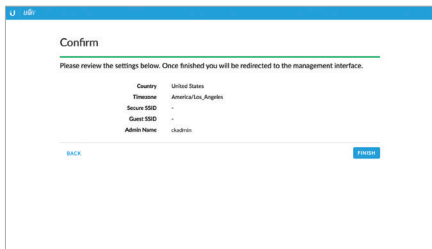

The screenshot shows the 'Confirm' step of the UniFi setup wizard. The header is blue with the UniFi logo. Below the title, a green progress bar is fully filled. The instruction reads: 'Please review the settings below. Once finished you will be redirected to the management interface.' A table lists the configured settings: Country (United States), Timezone (America/Los_Angeles), Secure SSID (-), Guest SSID (-), and Admin Name (ckadmin). At the bottom, there are 'BACK' and 'FINISH' buttons.


Confirm

Please review the settings below. Once finished you will be redirected to the management interface.

Country	United States
Timezone	America/Los_Angeles
Secure SSID	-
Guest SSID	-
Admin Name	ckadmin

BACK FINISH

- The login screen for the UniFi Controller will appear. Enter the *Admin Name* and *Password* that you created in the UniFi Setup Wizard. Click **Login**.

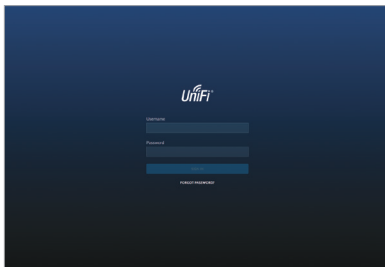

The UniFi Controller dashboard window will appear.

Adopting the UniFi Security Gateway


- From the UniFi Controller dashboard, click **Devices** in the left menu bar.



2. In the *Devices* window, locate *UniFi Gateway* in the list of devices under the *Model* column. To adopt and provision the gateway, click **Adopt**.

Device Name	IP Address	Status	Model	Version	WiFi SSID	Access
msb-000002	192.168.1.1	Online	IoT Security Gateway (P)	3.0.1	IoT-00	Access
msb-000003	192.168.1.100	Online	IoT Security Gateway (P)	3.0.1.4000	IoT-00-00-00-00	Access
Download-00-00-0000	192.168.1.21	Online	IoT Security Gateway (P)	3.0.1.4000	IoT-00-00-00-00	Access
iotgateway-00-00-0000	192.168.1.100	Online	IoT Security Gateway (P)	3.0.1.4000	IoT-00-00-00-00	Access
msb-000004	192.168.1.2	Online	IoT Security Gateway (P)	3.0.1.4000	IoT-00-00-00-00	Access
msb-000005	192.168.1.204	Online	IoT Security Gateway (P)	3.0.1.4000	IoT-00-00-00-00	Access
msb-000006	192.168.1.201	Online	IoT Security Gateway (P)	3.0.1.4000	IoT-00-00-00-00	Access
msb-000007	192.168.1.202	Online	IoT Security Gateway (P)	3.0.1.4000	IoT-00-00-00-00	Access
msb-000008	192.168.1.107	Online	IoT Security Gateway (P)	3.0.1.4000	IoT-00-00-00-00	Access
msb-000009	192.168.1.107	Online	IoT Security Gateway (P)	3.0.1.4000	IoT-00-00-00-00	Access
msb-000010	192.168.1.106	Online	IoT Security Gateway (P)	3.0.1.4000	IoT-00-00-00-00	Access
msb-000011	192.168.1.7	Online	IoT Security Gateway (P)	3.0.1.4000	IoT-00-00-00-00	Access
msb-000012	192.168.1.200	Online	IoT Security Gateway (P)	3.0.1.4000	IoT-00-00-00-00	Access
msb-000013	192.168.1.102	Online	IoT Security Gateway (P)	3.0.1.4000	IoT-00-00-00-00	Access
msb-000014	192.168.1.104	Online	IoT Security Gateway (P)	3.0.1.4000	IoT-00-00-00-00	Access
msb-000015	192.168.1.103	Online	IoT Security Gateway (P)	3.0.1.4000	IoT-00-00-00-00	Access
msb-000016	192.168.1.105	Online	IoT Security Gateway (P)	3.0.1.4000	IoT-00-00-00-00	Access
msb-000017	192.168.1.101	Online	IoT Security Gateway (P)	3.0.1.4000	IoT-00-00-00-00	Access
msb-000018	192.168.1.108	Online	IoT Security Gateway (P)	3.0.1.4000	IoT-00-00-00-00	Access
msb-000019	192.168.1.109	Online	IoT Security Gateway (P)	3.0.1.4000	IoT-00-00-00-00	Access
msb-000020	192.168.1.110	Online	IoT Security Gateway (P)	3.0.1.4000	IoT-00-00-00-00	Access
msb-000021	192.168.1.111	Online	IoT Security Gateway (P)	3.0.1.4000	IoT-00-00-00-00	Access
msb-000022	192.168.1.112	Online	IoT Security Gateway (P)	3.0.1.4000	IoT-00-00-00-00	Access
msb-000023	192.168.1.113	Online	IoT Security Gateway (P)	3.0.1.4000	IoT-00-00-00-00	Access
msb-000024	192.168.1.114	Online	IoT Security Gateway (P)	3.0.1.4000	IoT-00-00-00-00	Access
msb-000025	192.168.1.115	Online	IoT Security Gateway (P)	3.0.1.4000	IoT-00-00-00-00	Access
msb-000026	192.168.1.116	Online	IoT Security Gateway (P)	3.0.1.4000	IoT-00-00-00-00	Access
msb-000027	192.168.1.117	Online	IoT Security Gateway (P)	3.0.1.4000	IoT-00-00-00-00	Access
msb-000028	192.168.1.118	Online	IoT Security Gateway (P)	3.0.1.4000	IoT-00-00-00-00	Access
msb-000029	192.168.1.119	Online	IoT Security Gateway (P)	3.0.1.4000	IoT-00-00-00-00	Access
msb-000030	192.168.1.120	Online	IoT Security Gateway (P)	3.0.1.4000	IoT-00-00-00-00	Access
msb-000031	192.168.1.121	Online	IoT Security Gateway (P)	3.0.1.4000	IoT-00-00-00-00	Access
msb-000032	192.168.1.122	Online	IoT Security Gateway (P)	3.0.1.4000	IoT-00-00-00-00	Access
msb-000033	192.168.1.123	Online	IoT Security Gateway (P)	3.0.1.4000	IoT-00-00-00-00	Access
msb-000034	192.168.1.124	Online	IoT Security Gateway (P)	3.0.1.4000	IoT-00-00-00-00	Access
msb-000035	192.168.1.125	Online	IoT Security Gateway (P)	3.0.1.4000	IoT-00-00-00-00	Access
msb-000036	192.168.1.126	Online	IoT Security Gateway (P)	3.0.1.4000	IoT-00-00-00-00	Access
msb-000037	192.168.1.127	Online	IoT Security Gateway (P)	3.0.1.4000	IoT-00-00-00-00	Access
msb-000038	192.168.1.128	Online	IoT Security Gateway (P)	3.0.1.4000	IoT-00-00-00-00	Access
msb-000039	192.168.1.129	Online	IoT Security Gateway (P)	3.0.1.4000	IoT-00-00-00-00	Access

3. The *Status Indicator* on the UniFi Security Gateway will turn blue to confirm that it is successfully adopted.




Optional WAN Port Configuration via Layer 3

By default, the WAN port is set to *DHCP* so it can be assigned network settings by the service provider. To change the setting, connect a computer directly (or through a switch) to the *LAN 1* port of the UniFi Security Gateway.

1. From a web browser, go to **<https://setup.ubnt.com/>**




2. The UniFi Gateway login window will appear. Enter your *Username* and *Password*. Click **Sign In**.



Note: If the UniFi Security Gateway has not been adopted by a UniFi Controller, the login window will be skipped and the *Setup* window will appear.

3. In the *Setup* window, click **Edit Configuration** to configure the WAN port to *DHCP*, *Static IP*, or *PPPoE*.



For information on using the UniFi Controller software, refer to the User Guide located on our website at:
www.ubnt.com/download/unifi

Specifications

UniFi Security Gateway	
Dimensions	135 x 135 x 28.3 mm (5.32 x 5.32 x 1.11")
Weight	366 g (12.9 oz)
Networking Interfaces	
Serial Console Port	(1) RJ45 Serial Port
Data Ports	(3) 10/100/1000 Ethernet Ports
Max. Power Consumption	7W
Power Supply	12VDC, 1A Power Adapter (Included)
Supported Voltage Range	9 to 24VDC
LEDs	
System	Status
Serial Console Port	Power
Data Ports	Speed/Link/Activity
Layer 3 Forwarding Performance	
Packet Size: 64 Bytes	1,000,000 pps
Packet Size: 512 Bytes or Larger	3 Gbps (Line Rate)
Processor	Dual-Core 500 MHz, MIPS64 with Hardware Acceleration for Packet Processing
System Memory	512 MB DDR2 RAM
On-Board Flash Storage	2 GB
Rackmount	Yes
Operating Temperature	-10 to 45° C (14 to 113° F)
Operating Humidity	10 to 90% Noncondensing
Certifications	CE, FCC, IC

Safety Notices

1. Read, follow, and keep these instructions.
2. Heed all warnings.
3. Only use attachments/accessories specified by the manufacturer.



WARNING: Failure to provide proper ventilation may cause fire hazard. Keep at least 20 mm of clearance next to the ventilation holes for adequate airflow.



WARNING: To reduce the risk of fire or electric shock, do not expose this product to rain or moisture.



WARNING: Do not use this product in a location that can be submerged by water.



WARNING: Avoid using this product during an electrical storm. There may be a remote risk of electric shock from lightning.

Electrical Safety Information

1. Compliance is required with respect to voltage, frequency, and current requirements indicated on the manufacturer's label. Connection to a different power source than those specified may result in improper operation, damage to the equipment or pose a fire hazard if the limitations are not followed.
2. There are no operator serviceable parts inside this equipment. Service should be provided only by a qualified service technician.
3. This equipment is provided with a detachable power cord which has an integral safety ground wire intended for connection to a grounded safety outlet.
 - a. Do not substitute the power cord with one that is not the provided approved type. Never use an adapter plug to connect to a 2-wire outlet as this will defeat the continuity of the grounding wire.
 - b. The equipment requires the use of the ground wire as a part of the safety certification, modification or misuse can provide a shock hazard that can result in serious injury or death.
 - c. Contact a qualified electrician or the manufacturer if there are questions about the installation prior to connecting the equipment.
 - d. Protective earthing is provided by Listed AC adapter. Building installation shall provide appropriate short-circuit backup protection.
 - e. Protective bonding must be installed in accordance with local national wiring rules and regulations.

Limited Warranty

UBIQUITI NETWORKS, Inc (“UBIQUITI NETWORKS”) warrants that the product(s) furnished hereunder (the “Product(s)”) shall be free from defects in material and workmanship for a period of one (1) year from the date of shipment by UBIQUITI NETWORKS under normal use and operation. UBIQUITI NETWORKS’ sole and exclusive obligation and liability under the foregoing warranty shall be for UBIQUITI NETWORKS, at its discretion, to repair or replace any Product that fails to conform to the above warranty during the above warranty period. The expense of removal and reinstallation of any Product is not included in this warranty. The warranty period of any repaired or replaced Product shall not extend beyond its original term.

Warranty Conditions

The above warranty does not apply if the Product:

- (I) has been modified and/or altered, or an addition made thereto, except by Ubiquiti Networks, or Ubiquiti Networks’ authorized representatives, or as approved by Ubiquiti Networks in writing;
- (II) has been painted, rebranded or physically modified in any way;
- (III) has been damaged due to errors or defects in cabling;
- (IV) has been subjected to misuse, abuse, negligence, abnormal physical, electromagnetic or electrical stress, including lightning strikes, or accident;
- (V) has been damaged or impaired as a result of using third party firmware;
- (VI) has no original Ubiquiti MAC label, or is missing any other original Ubiquiti label(s); or
- (VII) has not been received by Ubiquiti within 30 days of issuance of the RMA.

In addition, the above warranty shall apply only if: the product has been properly installed and used at all times in accordance, and in all material respects, with the applicable Product documentation; all Ethernet cabling runs use CAT5 (or above), and for outdoor installations, shielded Ethernet cabling is used, and for indoor installations, indoor cabling requirements are followed.

Returns

No Products will be accepted for replacement or repair without obtaining a Return Materials Authorization (RMA) number from UBIQUITI NETWORKS during the warranty period, and the Products being received at UBIQUITI NETWORKS’ facility freight prepaid in accordance with the RMA process of UBIQUITI NETWORKS. Products returned without an RMA number will not be processed and will be returned freight collect or subject to disposal. Information on the RMA process and obtaining an RMA number can be found at: **www.ubnt.com/support/warranty**

Disclaimer

EXCEPT FOR ANY EXPRESS WARRANTIES PROVIDED HEREIN, UBIQUITI NETWORKS, ITS AFFILIATES, AND ITS AND THEIR THIRD PARTY DATA, SERVICE, SOFTWARE AND HARDWARE PROVIDERS HEREBY DISCLAIM AND MAKE NO OTHER REPRESENTATION OR WARRANTY OF ANY KIND, EXPRESS, IMPLIED OR STATUTORY, INCLUDING, BUT NOT LIMITED TO, REPRESENTATIONS, GUARANTEES, OR WARRANTIES OF MERCHANTABILITY, ACCURACY, QUALITY OF SERVICE OR RESULTS, AVAILABILITY, SATISFACTORY QUALITY, LACK OF VIRUSES, QUIET ENJOYMENT, FITNESS FOR A PARTICULAR PURPOSE AND NON-INFRINGEMENT AND ANY WARRANTIES ARISING FROM ANY COURSE OF DEALING, USAGE OR TRADE PRACTICE IN CONNECTION WITH SUCH PRODUCTS AND SERVICES. BUYER ACKNOWLEDGES THAT NEITHER UBIQUITI NETWORKS NOR ITS THIRD PARTY PROVIDERS CONTROL BUYER'S EQUIPMENT OR THE TRANSFER OF DATA OVER COMMUNICATIONS FACILITIES, INCLUDING THE INTERNET, AND THAT THE PRODUCTS AND SERVICES MAY BE SUBJECT TO LIMITATIONS, INTERRUPTIONS, DELAYS, CANCELLATIONS AND OTHER PROBLEMS INHERENT IN THE USE OF COMMUNICATIONS FACILITIES. UBIQUITI NETWORKS, ITS AFFILIATES AND ITS AND THEIR THIRD PARTY PROVIDERS ARE NOT RESPONSIBLE FOR ANY INTERRUPTIONS, DELAYS, CANCELLATIONS, DELIVERY FAILURES, DATA LOSS, CONTENT CORRUPTION, PACKET LOSS, OR OTHER DAMAGE RESULTING FROM ANY OF THE FOREGOING. In addition, UBIQUITI NETWORKS does not warrant that the operation of the Products will be error-free or that operation will be uninterrupted. In no event shall UBIQUITI NETWORKS be responsible for damages or claims of any nature or description relating to system performance, including coverage, buyer's selection of products (including the Products) for buyer's application and/or failure of products (including the Products) to meet government or regulatory requirements.

Limitation of Liability

EXCEPT TO THE EXTENT PROHIBITED BY LOCAL LAW, IN NO EVENT WILL UBIQUITI OR ITS SUBSIDIARIES, AFFILIATES OR SUPPLIERS BE LIABLE FOR DIRECT, SPECIAL, INCIDENTAL, CONSEQUENTIAL OR OTHER DAMAGES (INCLUDING LOST PROFIT, LOST DATA, OR DOWNTIME COSTS), ARISING OUT OF THE USE, INABILITY TO USE, OR THE RESULTS OF USE OF THE PRODUCT, WHETHER BASED IN WARRANTY, CONTRACT, TORT OR OTHER LEGAL THEORY, AND WHETHER OR NOT ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

Note

Some countries, states and provinces do not allow exclusions of implied warranties or conditions, so the above exclusion may not apply to you. You may have other rights that vary from country to country, state to state, or province to province. Some countries, states and provinces do not allow the exclusion or limitation of liability for incidental or consequential damages, so the above limitation may not apply to you. EXCEPT TO THE EXTENT ALLOWED BY LOCAL LAW, THESE WARRANTY TERMS DO NOT EXCLUDE, RESTRICT OR MODIFY, AND ARE IN ADDITION TO, THE MANDATORY

STATUTORY RIGHTS APPLICABLE TO THE LICENSE OF ANY SOFTWARE (EMBEDDED IN THE PRODUCT) TO YOU. The United Nations Convention on Contracts for the International Sale of Goods shall not apply to any transactions regarding the sale of the Products.

Compliance

FCC

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference, and
2. This device must accept any interference received, including interference that may cause undesired operation.

NOTE: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operations of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

ISED Canada

CAN ICES-3(A)/NMB-3(A)

This Class A digital apparatus complies with Canadian CAN ICES-3(A).

CAN ICES-3(A)/NMB-3(A)

Cet appareil numérique de la classe A est conforme à la norme NMB-3(A) Canada.

Australia and New Zealand



Warning: This is a Class A product. In a domestic environment this product may cause radio interference in which case the user may be required to take adequate measures.

CE Marking

CE marking on this product represents the product is in compliance with all directives that are applicable to it.



RoHS/WEEE Compliance Statement



English

European Directive 2012/19/EU requires that the equipment bearing this symbol on the product and/or its packaging must not be disposed of with unsorted municipal waste. The symbol indicates that this product should be disposed of separately from regular household waste streams. It is your responsibility to dispose of this and other electric and electronic equipment via designated collection facilities appointed by the government or local authorities. Correct disposal and recycling will help prevent potential negative consequences to the environment and human health. For more detailed information about the disposal of your old equipment, please contact your local authorities, waste disposal service, or the shop where you purchased the product.

Deutsch

Die Europäische Richtlinie 2012/19/EU verlangt, dass technische Ausrüstung, die direkt am Gerät und/oder an der Verpackung mit diesem Symbol versehen ist, nicht zusammen mit unsortiertem Gemeindeabfall entsorgt werden darf. Das Symbol weist darauf hin, dass das Produkt von regulärem Haushaltsmüll getrennt entsorgt werden sollte. Es liegt in Ihrer Verantwortung, dieses Gerät und andere elektrische und elektronische Geräte über die dafür zuständigen und von der Regierung oder örtlichen Behörden dazu bestimmten Sammelstellen zu entsorgen. Ordnungsgemäßes Entsorgen und Recyceln trägt dazu bei, potentielle negative Folgen für Umwelt und die menschliche Gesundheit zu vermeiden. Wenn Sie weitere Informationen zur Entsorgung Ihrer Altgeräte benötigen, wenden Sie sich bitte an die örtlichen Behörden oder städtischen Entsorgungsdienste oder an den Händler, bei dem Sie das Produkt erworben haben.

Español

La Directiva 2012/19/UE exige que los equipos que lleven este símbolo en el propio aparato y/o en su embalaje no deben eliminarse junto con otros residuos urbanos no seleccionados. El símbolo indica que el producto en cuestión debe separarse de los residuos domésticos convencionales con vistas a su eliminación. Es responsabilidad suya desechar este y cualesquiera otros aparatos eléctricos y electrónicos a través de los puntos de recogida que ponen a su disposición el gobierno y las autoridades locales. Al desechar y reciclar correctamente estos aparatos estará contribuyendo a evitar posibles consecuencias negativas para el medio ambiente y la salud de las personas. Si desea obtener información más detallada sobre la eliminación segura de su aparato usado, consulte a las autoridades locales, al servicio de recogida y eliminación de residuos de su zona o pregunte en la tienda donde adquirió el producto.

Français

La directive européenne 2012/19/UE exige que l'équipement sur lequel est apposé ce symbole sur le produit et/ou son emballage ne soit pas jeté avec les autres ordures ménagères. Ce symbole indique que le produit doit être éliminé dans un circuit distinct de celui pour les déchets des ménages. Il est de votre responsabilité de jeter ce matériel ainsi que tout autre matériel électrique ou électronique par les moyens de collecte indiqués par le gouvernement et les pouvoirs publics des collectivités territoriales. L'élimination et le recyclage en bonne et due forme ont pour but de lutter contre l'impact néfaste potentiel de ce type de produits sur l'environnement et la santé publique. Pour plus d'informations sur le mode d'élimination de votre ancien équipement, veuillez prendre contact avec les pouvoirs publics locaux, le service de traitement des déchets, ou l'endroit où vous avez acheté le produit.

Italiano

La direttiva europea 2012/19/UE richiede che le apparecchiature contrassegnate con questo simbolo sul prodotto e/o sull'imballaggio non siano smaltite insieme ai rifiuti urbani non differenziati. Il simbolo indica che questo prodotto non deve essere smaltito insieme ai normali rifiuti domestici. È responsabilità del proprietario smaltire sia questi prodotti sia le altre apparecchiature elettriche ed elettroniche mediante le specifiche strutture di raccolta indicate dal governo o dagli enti pubblici locali. Il corretto smaltimento ed il riciclaggio aiuteranno a prevenire conseguenze potenzialmente negative per l'ambiente e per la salute dell'essere umano. Per ricevere informazioni più dettagliate circa lo smaltimento delle vecchie apparecchiature in Vostro possesso, Vi invitiamo a contattare gli enti pubblici di competenza, il servizio di smaltimento rifiuti o il negozio nel quale avete acquistato il prodotto.

Declaration of Conformity

български [Bulgarian] С настоящото UBIQUITI NETWORKS декларира, че това устройство USG е в съответствие със съществените изисквания и други приложими разпоредби на Директиви 2014/30/ЕС, 2014/35/ЕС. Цялостният текст на ЕС декларацията за съответствие може да се намери на следния интернет адрес: **www.ubnt.com/compliance**

Hrvatski [Croatian] UBIQUITI NETWORKS ovim putem izjavljuje da je ovaj uređaj USG sukladan osnovnim zahtjevima i ostalim bitnim odredbama Direktiva 2014/30/EU, 2014/35/EU. Cjeloviti tekst EU izjave o sukladnosti dostupan je na sljedećoj internetskoj adresi: **www.ubnt.com/compliance**

Čeština [Czech] UBIQUITI NETWORKS tímto prohlašuje, že toto USG zařízení, je ve shodě se základními požadavky a dalšími příslušnými ustanoveními směrnic 2014/30/EU, 2014/35/EU. Úplné znění EU prohlášení o shodě je k dispozici na této internetové adrese: **www.ubnt.com/compliance**

Dansk [Danish] Hermed, UBIQUITI NETWORKS, erklærer at denne USG enhed, er i overensstemmelse med de væsentlige krav og øvrige relevante krav i direktiver 2014/30/EU, 2014/35/EU. EU-overensstemmelseserklæringens fulde tekst kan findes på følgende internetadresse: **www.ubnt.com/compliance**

Nederlands [Dutch] Hierbij verklaart UBIQUITI NETWORKS, dat deze USG apparaat, in overeenstemming is met de essentiële eisen en de andere relevante bepalingen van richtlijnen 2014/30/EU, 2014/35/EU. De volledige tekst van de EU-conformiteitsverklaring kan worden geraadpleegd op het volgende internetadres: **www.ubnt.com/compliance**

English Hereby, UBIQUITI NETWORKS, declares that this USG device, is in compliance with the essential requirements and other relevant provisions of Directives 2014/30/EU, 2014/35/EU. The full text of the EU declaration of conformity is available at the following internet address: **www.ubnt.com/compliance**

Eesti keel [Estonian] Käesolevaga UBIQUITI NETWORKS kinnitab, et antud USG seade, on vastavus olulistele nõuetele ja teistele asjakohastele sätetele direktiivide 2014/30/EL, 2014/35/EL. ELi vastavusdeklaratsiooni täielik tekst on kättesaadav järgmisel internetiaadressil: **www.ubnt.com/compliance**

Suomi [Finnish] Täten UBIQUITI NETWORKS vakuuttaa, että tämä USG laite, on yhdenmukainen olennaisten vaatimusten ja muiden sitä koskevien direktiivien 2014/30/EU, 2014/35/EU. EU-vaatimustenmukaisuusvakuutuksen täysimittainen teksti on saatavilla seuraavassa internetosoitteessa: **www.ubnt.com/compliance**

Français [French] Par la présente UBIQUITI NETWORKS déclare que l'appareil USG, est conforme aux exigences essentielles et aux autres dispositions pertinentes des directives 2014/30/UE, 2014/35/UE. Le texte complet de la déclaration UE de conformité est disponible à l'adresse internet suivante: **www.ubnt.com/compliance**

Deutsch [German] Hiermit erklärt UBIQUITI NETWORKS, dass sich dieses USG Gerät, in Übereinstimmung mit den grundlegenden Anforderungen und den anderen relevanten Vorschriften der Richtlinien 2014/30/EU, 2014/35/EU befindet. Der vollständige Text der EU-Konformitätserklärung ist unter der folgenden Internetadresse verfügbar: **www.ubnt.com/compliance**

Ελληνικά [Greek] Δια του παρόντος, UBIQUITI NETWORKS, δηλώνει ότι αυτή η συσκευή USG, είναι σε συμμόρφωση με τις βασικές απαιτήσεις και τις λοιπές σχετικές διατάξεις των οδηγιών 2014/30/ΕΕ, 2014/35/ΕΕ. Το πλήρες κείμενο της δήλωσης συμμόρφωσης ΕΕ διατίθεται στην ακόλουθη ιστοσελίδα στο διαδίκτυο: **www.ubnt.com/compliance**

Magyar [Hungarian] Ezennel UBIQUITI NETWORKS kijelenti, hogy ez a USG készülék megfelel az alapvető követelményeknek és más vonatkozó 2014/30/EU, 2014/35/EU irányelvek rendelkezéseit. Az EU-megfelelőségi nyilatkozat teljes szövege elérhető a következő internetes címen: **www.ubnt.com/compliance**

Íslenska [Icelandic] Hér, UBIQUITI NETWORKS, því yfir að þetta USG tæki er í samræmi við grunnkröfur og önnur viðeigandi ákvæði tilskipana 2014/30/ESB, 2014/35/ESB. Fullur texti ESB samræmisýfirlýsing er að finna á eftirfarandi netfangi: **www.ubnt.com/compliance**

Italiano [Italian] Con la presente, UBIQUITI NETWORKS, dichiara che questo dispositivo USG, è conforme ai requisiti essenziali ed alle altre disposizioni pertinenti delle direttive 2014/30/UE, 2014/35/UE. Il testo completo della dichiarazione di conformità UE è disponibile al seguente indirizzo Internet: **www.ubnt.com/compliance**

Latvīq kalba [Latvian] Ar šo, UBIQUITI NETWORKS, deklarē, ka USG ierīce, ir saskaņā ar būtiskajām prasībām un citiem attiecīgiem noteikumiem Direktīvās 2014/30/ES, 2014/35/ES. Pilns ES atbilstības deklarācijas teksts ir pieejams šādā interneta vietnē: **www.ubnt.com/compliance**

Lietuvių kalba [Lithuanian] UBIQUITI NETWORKS deklaruoja, kad šis USG įrenginys atitinka esminius reikalavimus ir kitas 2014/30/ES, 2014/35/ES Direktyvų nuostatas. Visas ES atitikties deklaracijos teksto prieinamas šiuo interneto adresu: **www.ubnt.com/compliance**

Malti [Maltese] Hawnhekk, UBIQUITI NETWORKS, tidlikjara li dan il-mezz USG huwa konformi mar-rekwiżiti essenzjali u dispożizzjonijiet rilevanti oħrajn ta' Direttivi 2014/30/UE, 2014/35/UE. Id-dikjarazzjoni tal-konformità tista' tiġi kkonsultata minn **www.ubnt.com/compliance**

Norsk [Norwegian] Herved UBIQUITI NETWORKS, erklærer at denne USG enheten, er i samsvar med de grunnleggende kravene og andre relevante bestemmelser i direktivene 2014/30/EU, 2014/35/EU. Den fulle teksten til EU-samsvarserklæringen er tilgjengelig på følgende internettadresse: **www.ubnt.com/compliance**

Polski [Polish] Niniejszym, Ubiquiti Networks, oświadcza, że urządzenie USG, jest zgodny z zasadniczymi wymaganiami oraz pozostałymi stosownymi postanowieniami Dyrektyw 2014/30/UE, 2014/35/UE. Pełny tekst deklaracji zgodności UE jest dostępny pod następującym adresem internetowym: **www.ubnt.com/compliance**

Português [Portuguese] UBIQUITI NETWORKS declara que este dispositivo USG, está conforme com os requisitos essenciais e outras disposições das Directivas 2014/30/UE, 2014/35/UE. O texto integral da declaração de conformidade está disponível no seguinte endereço de Internet: **www.ubnt.com/compliance**

Română [Romanian] Prin prezenta, UBIQUITI NETWORKS declară că acest dispozitiv USG este în conformitate cu cerințele esențiale și alte prevederi relevante ale Directivelor 2014/30/UE, 2014/35/UE. Textul integral al declarației UE de conformitate este disponibil la următoarea adresă internet: **www.ubnt.com/compliance**

Slovenčina [Slovak] Týmto UBIQUITI NETWORKS, prehlasuje, že toto USG zariadenie, je v súlade so základnými požiadavkami a ďalšími relevantnými ustanoveniami smernice 2014/30/EÚ, 2014/35/EÚ. Úplné EÚ vyhlásenie o zhode je k dispozícii na tejto internetovej adrese: **www.ubnt.com/compliance**

Slovenščina [Slovenian] Družba UBIQUITI NETWORKS izjavlja, da je naprava USG v skladu z obveznimi zahtevami in drugimi ustreznimi določbami direktiv 2014/30/EU in 2014/35/EU. Celotno besedilo izjave EU o skladnosti je na voljo na naslednjem spletnem naslovu: **www.ubnt.com/compliance**

Español [Spanish] Por medio de la presente UBIQUITI NETWORKS declara que este dispositivo USG, cumple con los requisitos esenciales y cualesquiera otras disposiciones aplicables o exigibles de las Directivas 2014/30/UE, 2014/35/UE. El texto completo de la declaración UE de conformidad está disponible en la dirección Internet siguiente: **www.ubnt.com/compliance**

Svenska [Swedish] Härmed UBIQUITI NETWORKS, intygar att denna USG enhet är i överensstämmelse med de väsentliga egenskapskrav och övriga relevanta bestämmelser som framgår av direktiven 2014/30/EU, 2014/35/EU. Den fullständiga texten till EU-försäkran om överensstämmelse finns på följande webbadress: **www.ubnt.com/compliance**

Online Resources

Website www.ubnt.com

Support help.ubnt.com

Community community.ubnt.com

Downloads downloads.ubnt.com

Ubiquiti Networks, Inc.
685 Third Avenue, 27th Floor
New York, NY 10017
USA



©2014-2017 Ubiquiti Networks, Inc. All rights reserved. Ubiquiti, Ubiquiti Networks, the Ubiquiti U logo, the Ubiquiti beam logo, and UniFi are trademarks or registered trademarks of Ubiquiti Networks, Inc. in the United States and in other countries. All other trademarks are the property of their respective owners.

NBPH081717